





BM-SERIES

BM-D450

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

Throat Diameter	: 25	mm (1 in)
Mounting Type	: Bolt-On	
Nominal Impedance	: 8	ohm
D.C Resistance	: 6.4	ohm
Power Capacity	: 80	W Continuous Program
Sensitivity 1W/1M	: 108	dB With PH-3220
Usable Frequency Range	: 1.5K~18K	Hz
Recommended Crossover	: 2.2	Hz 12dB/oct
Voice Coil Diameter	: 44.4	mm (1.75 in)
Magnetic Assembly Weight	: 2.5	Kg (5.5 lb)
Flux Density	: 1.7	T
Magnet	: Strontium Ferrite	
Diaphragm Material	: Titanium	
Voice Coil Material	: Edge Wound Copper Clad Aluminium Ribbon	
Voice Coil Former	: Resin Bonded Kapton	

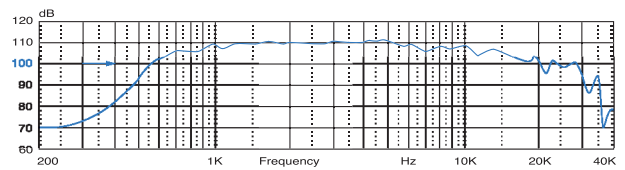

BM-D450S

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

Throat Diameter	: 25	mm (1 in)
Mounting Type	: Screw-On	
Nominal Impedance	: 8	ohm
D.C Resistance	: 6.4	ohm
Power Capacity	: 80	W Continuous Program
Sensitivity 1W/1M	: 108	dB With PH-3220
Usable Frequency Range	: 1.5K~18K	Hz
Recommended Crossover	: 2.2	Hz 12dB/oct
Voice Coil Diameter	: 44.4	mm (1.75 in)
Magnetic Assembly Weight	: 2.7	Kg (5.94 lb)
Flux Density	: 1.7	T
Magnet	: Strontium Ferrite	
Diaphragm Material	: Titanium	
Voice Coil Material	: Edge Wound Copper Clad Aluminium Ribbon	
Voice Coil Former	: Resin Bonded Kapton	

