



BM-SERIES

BM-D750

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

Throat Diameter	: 50 mm (2in)
Mounting Type	: Bolt-On
Nominal Impedance	: 8~16 ohm
D.C Resistance	: 6.3 ohm
Power Capacity	: 100 W Continuous Program
Sensitivity 1W/1M	: 108 dB With PH-2380
Usable Frequency Range	: 500~18K Hz
Recommended Crossover	: 800 Hz Or Higher, 12dB/oct. minimum
Voice Coil Diameter	: 72.2 mm (2.84 in)
Magnetic Assembly Weight	: 4.6 Kg (9.9 lb)
Flux Density	: 1.8 T
Magnet	: Strontium Ferrite
Diaphragm Material	: Titanium
Voice Coil Material	: Edge Wound Wire Aluminium Ribbon
Voice Coil Former	: Resin Bonded Nomex

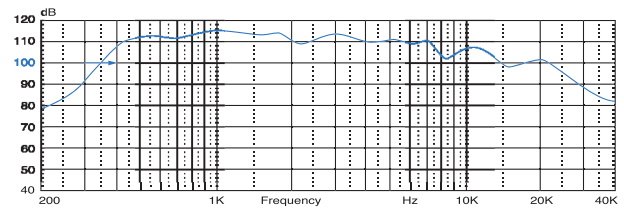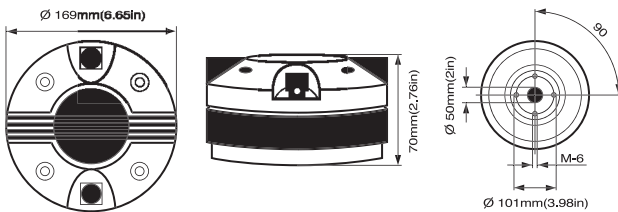

BM-D740

HIGH FREQUENCY COMPRESSION UNIT

GENERAL SPECIFICATIONS

Throat Diameter	: 36 mm (1.4 in)
Mounting Type	: Bolt-On
Nominal Impedance	: 8~16 ohm
D.C Resistance	: 6.3 ohm
Power Capacity	: 75 W Continuous Program
Sensitivity 1W/1M	: 109 dB With PH- 2380
Usable Frequency Range	: 500~18K Hz
Recommended Crossover	: 500 Hz Or Higher, 18dB/oct. minimum
Voice Coil Diameter	: 72.2 mm (2.84 in)
Magnetic Assembly Weight	: 4.7 Kg (10.34 lb)
Flux Density	: 1.8 T
Magnet	: Strontium Ferrite
Diaphragm Material	: Titanium
Voice Coil Material	: Edge Wound Wire Aluminium Ribbon
Voice Coil Former	: Resin Bonded Nomex

